


- ① BL-5308 TWO-WIRE FLOW SENSOR
- ② BL-PFS-XXX TWO-WIRE READY FLOW SENSOR
- ③ TWO -WIRE SIZE AND COLOR PER PLAN
- ⑤ STRAIGHT PIPE - 10 PIPE DIAMETERS UPSTREAM & 5 PIPE DIAMETERS DOWNSTREAM
- ⑥ SUPPORT BLOCK AT CORNERS OF EACH VALVE BOX - TYPICAL OF 4 PER VALVE BOX
- ⑦ GRANULAR MATERIAL FOR DRAINAGE-2" MINIMUM DEPTH
- ⑧ RED TO RED AND BLACK TO BLACK

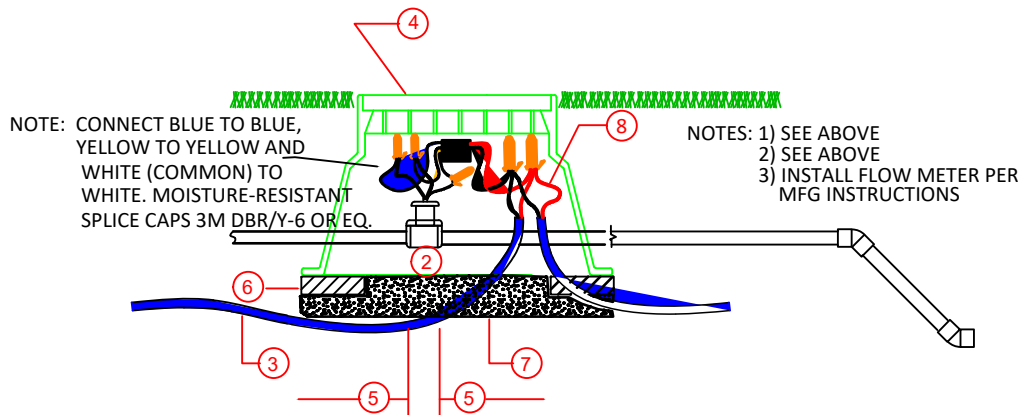

BL-5308 FLOW BICODER & THIRD PARTY FLOW SENSOR INSTALLATION & WIRING

NTS