


- ① BL-PFS-SERIES TWO-WIRE READY FLOW SENSOR
- ② TWO-WIRE SIZE AND COLOR PER PLAN
- ③ STRAIGHT PIPE - 10 PIPE DIAMETERS UPSTREAM & 5 PIPE DIAMETERS DOWNSTREAM
- ④ SUPPORT BLOCK AT CORNERS OF EACH VALVE BOX - TYPICAL OF 4 PER VALVE BOX
- ⑤ GRANULAR MATERIAL FOR DRAINAGE 2" MINIMUM DEPTH
- ⑥ VALVE BOX
- ⑦ MOISTURE-RESISTANT SPLICE CAPS 3M DBR/Y-6 OR EQ.
- ⑧ RED TO RED AND BLACK TO BLACK

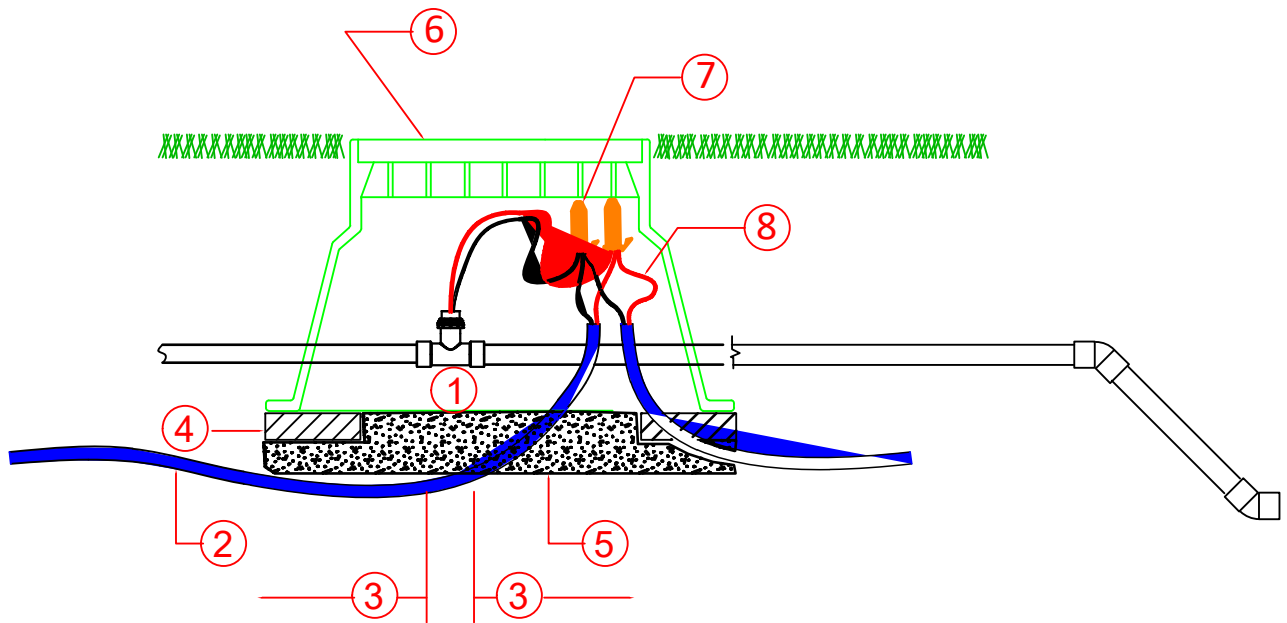

BL-PFS-SERIES FLOW SENSOR INSTALLATION & WIRING NTS